

Programmable POS Keyboard ET-PKB-044/078 Series



ET-PKB-044



ET-PKB-078

FEATURES

- < Membrane key switches with tactile feeling
- < 10 million strokes operating life cycles
- < True keyboard wedge function: Key Code or ASCII Code
- < Windows software programming without TSR program
- < Magnetic stripe card reader available with various track combinations
- < 6 positions key lock function
- < Each key can be programmed up to 200 codes
- < Up to 16 layers programming capability
- < Non-volatile memory 10KB



ISO-9002 Certified



SPECIFICATIONS

Models	ET-PKB-044	ET-PKB-078
	<i>Physical</i>	
Material	ABS	
Interface	PS/2	
Key Switch	Membrane	Membrane or Mechanical (Option)
Dimension	234L x 144W x 45H mm	290L x 175W x 45H mm
Cable Length	2800mm	
Weight	0.68Kg	1.12Kg
Color	Black or white (Option)	
Travel Distance	4±0.5mm	
Operating Life Cycles	10 million strokes	
	<i>Electrical</i>	
Power Supply	+5VDC±10%	
Interface	PS/2	
Current Input	≤ 100mA	
	<i>Magstripe Card Reader (Option)</i>	
Card Density	Track 1: 210BPI with max. 76 characters Track 2: 75BPI with max. 37 characters Track 3: 210BPI with max. 107 characters	
Magnetic Tracks	Track 1 or Track 2 or Track 3 or Dual Track (Track 1&2 or Track 2&3) or Three Track (Track 1&2&3)	
Card Swipe Speed	10 to 100 cm/sec.	
Swipe Cycles	300,000 or 1,000,000 (Option)	
	<i>Others</i>	
OS	Windows 98, ME, 2000, XP, Vista 32	
6 Position Key Lock & Keys	Option	Standard
Operating Temperature	0°C ~+40°C	
Storage Temperature	-20°C ~+55°C	
Operating Humidity	40%~90%	

DIMENSIONS

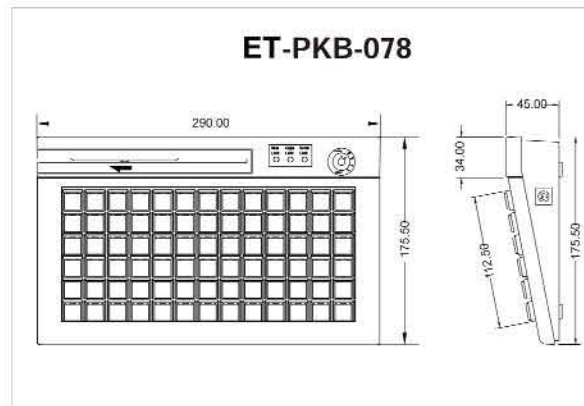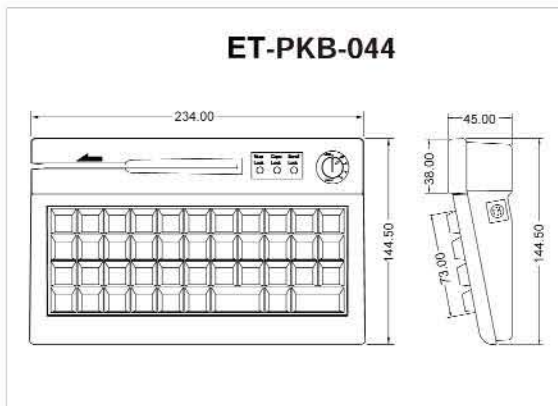

128-2 Adesso Drive
Vaughan, ON L4K 3C3
Tel: 905-738-8428
Fax: 905-738-1004
Toll Free: 1-877-738-8428
sales@elitedigitalsolutions.com
www.elitedigitalsolutions.com

Distributor